

## DH-NVR4204/4208/4216/4232

### 4/8/16/32CH 1U Network Video Recorder



### Features

- > Up to 4/8/16/32 channel IP camera input
- > H.264/MJPEG dual codec decoding
- > Max 200Mbps incoming bandwidth
- > Up to 5Mp resolution preview&playback
- > HDMI/VGA simultaneous video output
- > 4/8/16 channel synchronous realtime playback, GRID interface
- > Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek and etc.
- > ONVIF Version 2.4 conformance
- > 3D intelligent positioning with Dahua PTZ camera
- > Support 2 SATA HDDs up to 8TB, 2 USB(1 USB3.0)
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

# DH-NVR4204/4208/4216/4232


## Technical Specifications

Model	DH-NVR4204	DH-NVR4208	DH-NVR4216	DH-NVR4232
<b>System</b>				
Main Processor	Dual-core embedded processor			
Operating System	Embedded LINUX			
<b>Video&amp; Audio</b>				
IP Camera Input	4 channel	8 channel	16 channel	32 channel
Two-way Talk	1channel Input, 1channel Output, RCA			
<b>Display</b>				
Interface	1 HDMI,1 VGA			
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768			
Display Split	1/4	1/4/8/9	1/4/8/9/16	1/4/8/9/16
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording			
<b>Recording</b>				
Compression	H.264/MJPEG			
Resolution	5Mp (2560×1920) /3Mp (2048×1536) /1080P(1920×1080) / 720P(1280×720) / D1 (704×576/704×480)&etc.			
Record Rate	200Mbps			
Bit Rate	48~ 8192kbps			
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop			
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec			
<b>Video Detection &amp; Alarm</b>				
Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips			
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank			
Alarm Input	4 channel			
Relay Output	2 channel			
<b>Playback &amp; Backup</b>				
Sync Playback	1/4	1/4/8	1/4/8/16	1/4/8/16
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search			
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom			
Backup Mode	USB Device/Network/Internal SATA burner			
<b>Network</b>				
Ethernet	1 RJ-45 port (10/100/1000Mbps)			
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Alarm Server, IP Search(Support Dahua IP camera, DVR, NVS and etc.)			
Max. UserAccess	128 users			
Smart Phone	iPhone, iPad, Android			
<b>Storage</b>				
Internal HDD	2 SATA ports, up to 8TB			

## DH-NVR4204/4208/4216/4232

Auxiliary Interface	
USB	2 ports (1 Rear USB3.0,1 Front USB2.0)
RS232	1 port, For PC communication&Keyboard
RS485	1 port, For PTZ control
General	
Power Supply	DC12V/4A
Power Consumption	20W(without HDD)
Working Environment	-10°C ~+55°C / 10%~90%RH / 86~106kpa
Dimension (W×D×H)	1U, 375mm×282mm×56mm
Weight	2.0KG(without HDD)

### System Connection

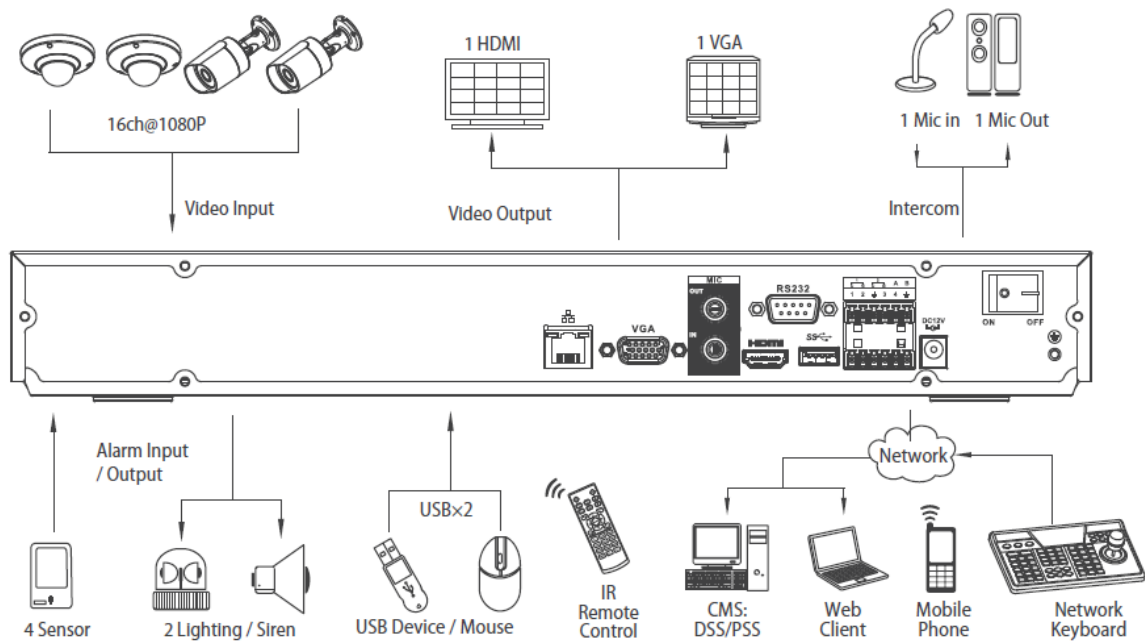

\*Takes NVR4216 as an example

### Dahua Technology Co., Ltd.

1199'BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

\*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.