



DS-2CC12D9T-A HD1080p Box Camera

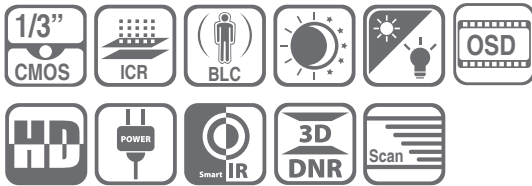

Key Features

- HD1080p Video Output
- HD-TVI Technology
- True Day/Night
- 3D DNR, Smart IR
- True WDR, Up to 120 dB
- OSD Menu Controlled via UTC
- Alarm Input and Output
- Dual Voltage

Dimensions

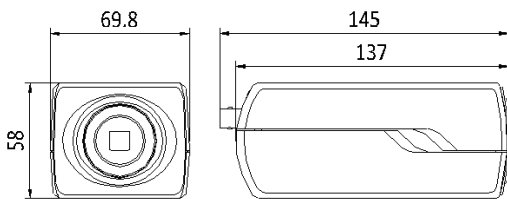

Accessories



WBL
Wall Mounting
Long Arm



WBS
Wall Mounting
Short Arm



CHB Series
Outdoor Housing



DS-1H18
Video Balun

Lenses



HV3816D-8MPIR Auto Iris
Manual Focusing 8 MP HD Lens



HV1140D-8MPIR Auto Iris
Manual Focusing 8 MP HD Lens



TV2810D-MPIR Auto Iris
Manual Focusing 3 MP IR Lens

DS-2CC12D9T-A	
Camera	
Image Sensor	1/3" progressive scan CMOS
Signal System	PAL/NTSC
Effective Pixels	1920 x 1080
Minimum Illumination	Color: 0.01 lux @ (f/1.2, AGC on); B/W: 0.001 lux @ (f/1.2, AGC on)
Shutter Time	1/25 (1/30) s to 1/50,000 s
Lens Mount	C/CS mount
Auto Iris	ICR
Synchronization	Internal synchronization
WDR	120 dB
Video Frame Rate	1080p@25 fps/1080p @ 30fps
HD Video Output	1 analog HD output
CVBS Output	1 Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 52 dB
Menu	
Scene	Indoor, outdoor, indoor1, LOW-LIGHT
Camera ID	On/off (15 characters, position programmable)
AGC	Supported
D/N Mode	Color/BW/EXT
White Balance	ATW, AWC-SET, indoor, outdoor, manual
Privacy Mask	On/off, maximum 8 zones
Motion Detection	On/off, maximum 4 zones
BLC	Supported
Anti-flicker	On/off
Functions	HSBLC (Eclipse), digital noise reduction, digital zoom (62x), slow shutter, mirror, defog, defect pixel correction, SMART D-ZOOM
General	
Working Temperature/Humidity	-30° C to 60° C (-22° F to 140° F), humidity 90% or less (non-condensing)
Power	24 VAC, 12 VDC
Power Consumption	Maximum 3.5 W
Communication	Up-the-Coax (need UTC controller) Protocol: Pelco-C
Dimensions	69.8 mm × 58 mm × 145 mm (2.68" × 2.56" × 5.70")
Weight	830 g (1.83 lbs)

Order Model

DS-2CC12D9T-A